


Collamat® 9100

The Collamat® 9100 is a high performance labelling system for speeds up to 100 m/min (328 ft/min). Due to the modular concept adaptation to your specific requirements can be done with minimal effort. Robust design gives not just high stability to feed labels up to a width of 250 mm (9,84 in) but makes the system also able to work under rough conditions. High speed is nothing without reliability. Non-stop configuration ensures best possible production reliability and minimal line downtime for constant production performance. The Collamat 9100 is your choice for demanding, high volume productions and rough conditions.



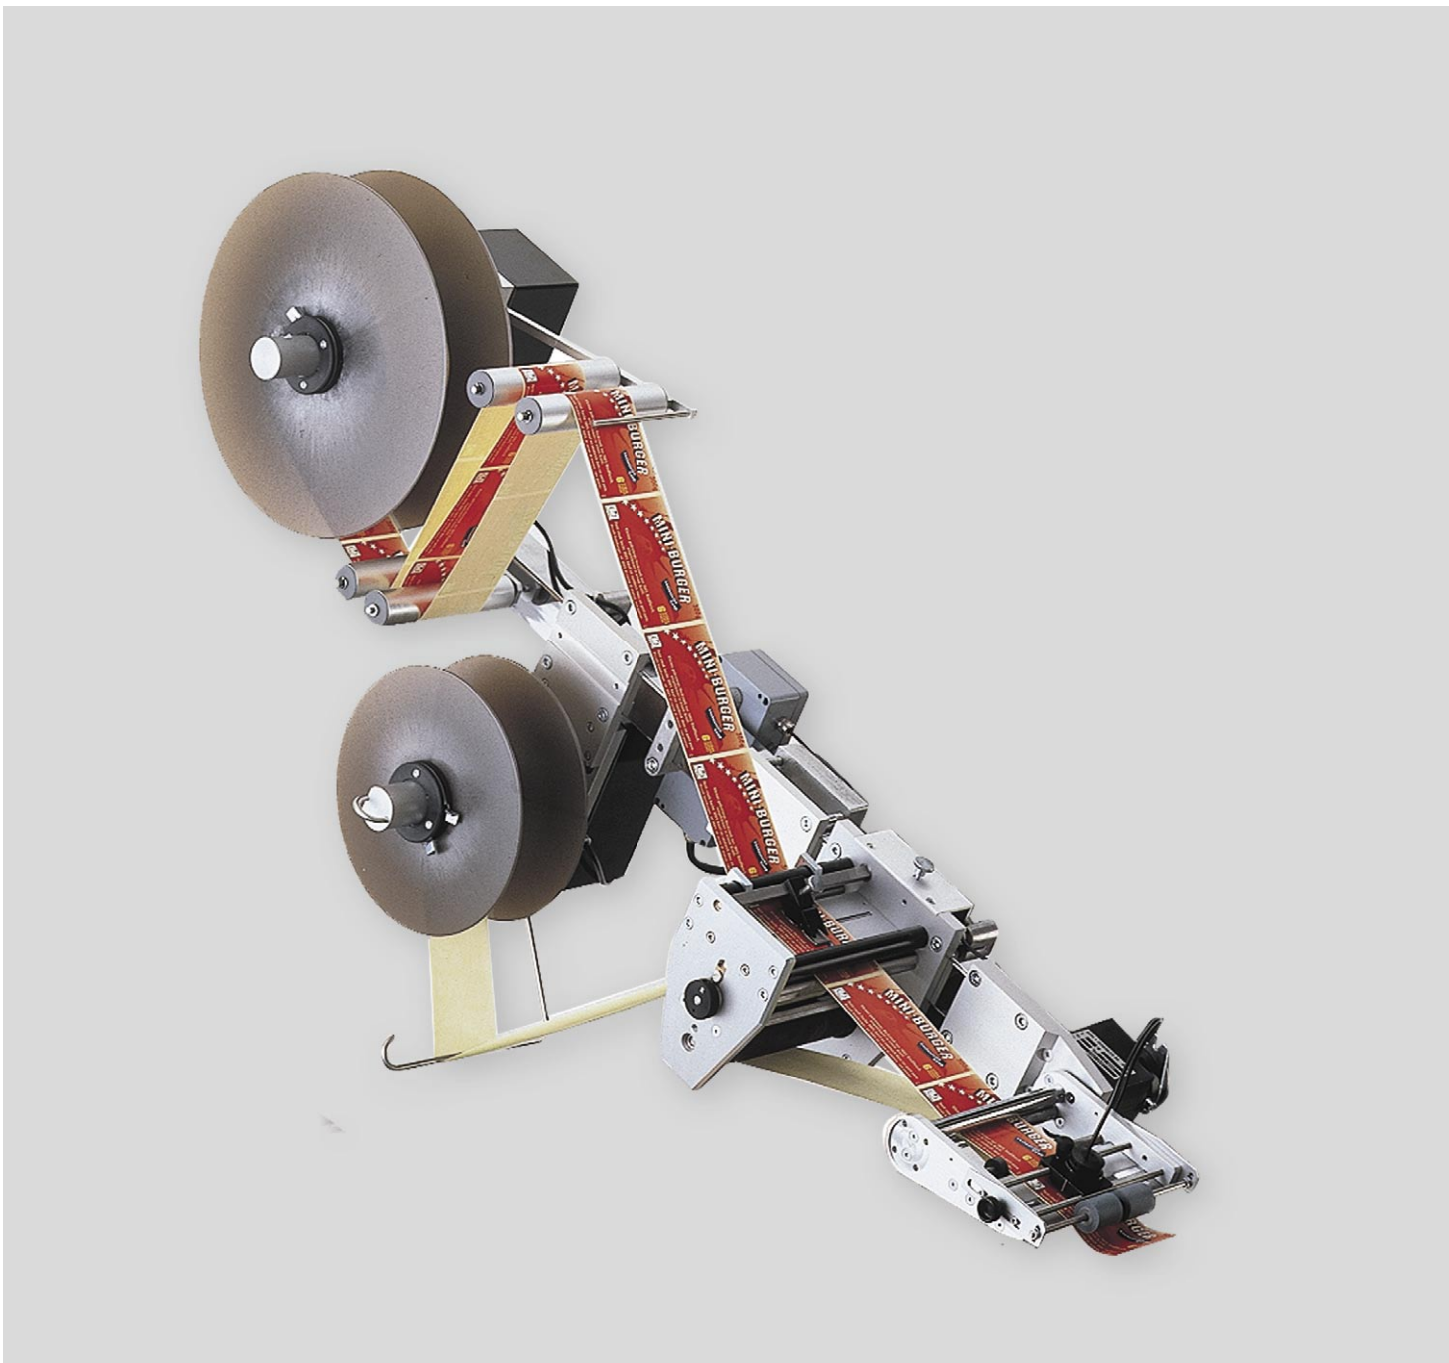

FEATURES

- Robust design – For heavy loads and rough conditions
- Speed – The system is capable to follow your production up to speeds of 100 m/min
- Flexibility – Due to the modular design the system can be assembled or re-configured best suitable to your requirements
- Label size – Restriction of size is on a high level and is no issue up to a width of 250 mm
- Independent – Encoder speed adaptation and non-stop configuration offers you highest possible availability with minimal manpower
- User-friendly – With the intuitive menu structure the operating of the labeller is no difficulty
- Swiss design – Minimal wear and tear ensuring reliable and consistent labelling accuracy

TECHNICAL DATA

	9110	9120	9130
Passing width of label web:	95 mm (3,74 in)	160 mm (6,3 in)	250 mm (9,8 in)
Dispensing speed per minute:	100 m (328 ft)	60 m (197 ft)	40 m (131ft)
Labelling accuracy:	± 0.4 mm(1/60 in)	± 0.5 mm(1/50 in)	±0.75 mm (1/33 in)
Label reel:	Max outer diameter 350 mm (13,8 in)		
Drive:	3 phase stepping motor		
Control unit:	Micro-processor control unit, SMD-technology, non stop labelling, 32 label programs, service functions, profiling, multiple labelling		
Power supply:	110-240 V / 50-60 Hz / 480 VA		
Approbation:	CE/Gost		

All data are indicative and may be subject to alteration

HM Collamat AG
Pfeffingerring 201
CH-4147 Aesch

Phone: +41 (0)61 756 28 28
Fax: +41 (0)61 756 29 29
Web: www.collamat.ch
E-mail: contact@collamat.ch

Member of HM Group